

CU 7702 4P / 2x4P F8

Data cable, S/FTP, Category 7_A, AWG22



- 1 Inner conductor:** AWG22 Bare copper wire
- 2 PE insulated conductor:** 1.5 mm Ø
- 3 Screen (pair):** Alu PETP foil
- 4 Overall screen:** Tinned braided copper
- 5 Outer sheath:** FRNC/LSOH orange RAL 2003



DESCRIPTION

Electrically and mechanically superior quality Cat.7A data cable - exceeds the requirements of ISO/IEC 11801, IEC 61156-5, IEC 61156-7, EN 50173-1 and prEN 50288-9-1.

Excellent shielding effect due to individually screened pairs and overall copper braid.

Easy identification of wires thanks to longitudinal colour markings.

Compatible with all current connecting hardware in accordance with EN 50173 and ISO/IEC 11801.

APPLICATION

Data cable for structured premises cabling.

For the transmission of digital and analogue voice, video and data signals.

Suitable for all ICT network applications up to class F_A applications (1000 MHz) in accordance with EN 50173-1 and ISO/IEC 11801 and

for the transmission of broadband signals (such as cable TV) in accordance with IEC 15018.

Due to the increased wire section eminently suited for Power over Ethernet (PoE) / PoE+.

ELECTRICAL CHARACTERISTICS

Category				5e	6	6 _A	7	CATV	7 _A	
Frequency [MHz]	1	4	10	100	250	500	600	862	1000	1200
Attenuation [dB/100m]	1.7	3.4	5.3	16.9	27	40	42	53	56	62
NEXT [dB]	103	103	103	103	103	98	96	92	90	85
PS NEXT [dB]	100	100	100	100	100	95	93	89	87	82
ACR-N [dB]	101	100	98	86	76	58	54	39	34	23
PS-ACR-N [dB]	98	97	95	83	73	55	51	36	31	20
ACR-F [dB]	109	107	105	93	83	70	65	57	54	46
PS-ACR-F [dB]	106	104	102	90	80	67	62	54	51	43
Return loss [dB]	26	30	33	33	28	26	25	24	23	21


These performance data are typical measured values.

MECHANICAL PROPERTIES

		CU 7702 4P	CU 7702 2x4P F8
Bending radius (flat side)	during draw-in:	≥ 64 mm	≥ 64 mm
	permanently installed:	≥ 32 mm	≥ 32 mm
Tensile strength:		≤ 120 N	≤ 240 N
Crush resistance:		≥ 1000 N/10 cm	≥ 1000 N/10 cm
Impact:		≥ 10 impacts	≥ 10 impacts
Temperature range	during installation:	0° C to + 50° C	0° C to + 50° C
	in operation:	-20° C to + 60° C	-20° C to + 60° C

ELECTRICAL PROPERTIES

Loop resistance at 20° C:	116 Ω/km
Mutual capacitance:	43 pF/m
Impedance at 100 MHz:	100 Ω ± 5 Ω
Transfer impedance at 1/10/30 MHz:	< 5/5/8 mΩ/m
Coupling attenuation (limit curve of critical state - IEC 61156):	> 85 dB
Near end unbalance attenuation	> 40 dB
LCL at 1-600 MHz :	
Delay skew:	15 ns/100m
NVP:	76 %

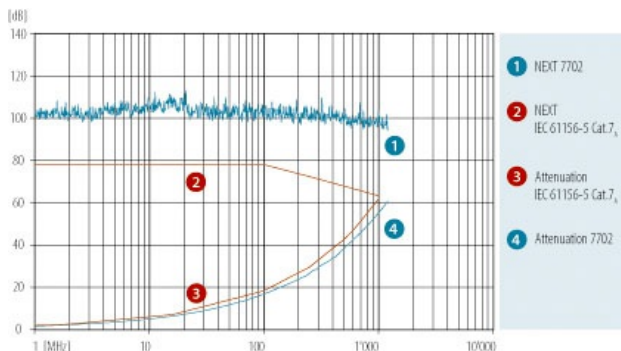

STANDARDS

Wire colour	white-blue/blue white-orange/orange white-green/green white-brown/brown (with longitudinal stripes) in accordance with IEC 60189 and IEC 60708
Imprint	DATWYLER «cable type» «additional text» «batch number» «meter marks»
Zero halogen, no corrosive gases	IEC 60754-1/-2, EN 50267-2-1/-2-2, VDE 0482-267-2-1/-2-2, AREI-RGIE Art.104-SA
Flame propagation	IEC 60332-1/-2, EN 60332-1-2, VDE 0482-332-1-2, AREI-RGIE Art.104-F1
Flame spread	IEC 60332-3-24, EN 60332-3-24, AREI-RGIE Art.104-F2
Smoke density	IEC 61034-1/-2, EN 61034-1/-2, VDE 0482-1034-1/-2, AREI-RGIE Art.104-SD
PoE	IEEE 802.3at
EMC	shielded
Cat./Class	Cat 7 _A / Class F _A - limit values as specified by IEC 61156-5 and EN 50288-9-1 guaranteed
Segregation class	d

VERSIONS

Article Number	Product	Sheath	Sheath Ø [mm]	Sheath colour	Weight [kg/km]	Cu rate [kg/km]	Fire load [kWh/m]	Fire load [MJ/m]	Dimension n x p x [mm PU (AWG)]	
177400	CU 7702 4P	FRNC/LSOH	7.8	orange	65.1	34.9	0.18	0.65	4 x 2 x 0.62 (AWG22)	1000 m

CU 7702 4P / 2x4P F8
Data cable, S/FTP, Category 7_A, AWG22



177390	CU 7702 2x4P F8	FRNC/LS0H 7.8 x 16.4	orange	131.0	69.8	0.36	1.30	2 x (4 x 2 x 0.62 (AWG22))	drum 500 m drum
--------	--------------------	----------------------	--------	-------	------	------	------	-------------------------------	-----------------------